



IC LED OUTDOOR STEP LIGHT

Project: _____

Fixture Type: _____

Location: _____

Contact/Phone: _____

LED IC115LEDHSG, IC115LEDPM



PRODUCT DESCRIPTION

The LED step light is rated for use in outdoor or indoor wall mount applications including concrete pour, brick masonry or drywall

- Recessed housing is IC rated and can be completely covered with insulation
- Back housing ships separately from power module for rough-in purposes
- Designed to provide 50,000 hours of life and is compatible with standard trims
- 5 year warranty on LED components.

ENVIRONMENTALLY FRIENDLY, ENERGY EFFICIENT

- No harmful ultraviolet or infrared wavelengths
- No lead or mercury
- Comparable light output to compact fluorescent step light

PRODUCT SPECIFICATIONS

Housing Die cast aluminum housing painted white for durability

- Gasket for water tight seal in wet locations
- Cover plate provided to protect housing interior during rough-in
- (2) 1/2" conduit compression fittings provided for wiring
- (1) conduit fitting plug included
- Two brackets supplied for nailing unit to studs.

Power Module LED light engine and driver mounted directly to metal tray assembly for ease of wiring and installation into housing after rough-in.

LED Light Engine: LED PCB utilizes 1 watt high lumen output LEDs binned to Energy Star standards • 3000K or 4000K color temperatures available.

LED Driver: Non-dimming driver accommodates input voltage of 120 volts AC at 50/60Hz • Power factor > 0.9 at 120V input

- Driver is thermally protected and has integral overload and short circuit protection
- Terminal connections provided as standard for easy removal.

Trims Available in textured white or black powder coat on cast aluminum

- Fastens to housing with two allen head screws
- Opal diffuser supplied with all trims.

Life Rated for 50,000 hours at 70% lumen maintenance.

Labels UL listed for wet locations, concrete pour approved

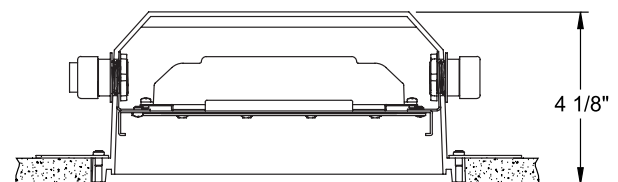
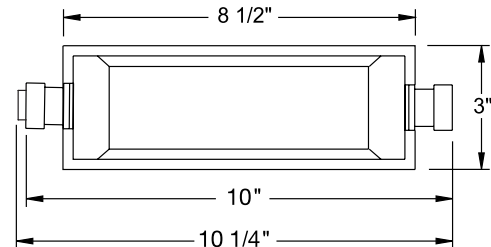
- UL and cUL Listed, RoHS compliant.

Testing All reports are based on published industry procedures; field performance may differ from laboratory performance.

Specifications subject to change without notice.

DIMENSIONS

IC115LEDHSG








9" X 3" WALL OPENING

ELECTRICAL DATA

Input Voltage	120V
Input Power	6.4W
Input Current	0.06A
Frequency	50/60Hz
THD	<10%
Minimum starting temp	-20°C (-4°F)

ORDERING INFORMATION: Housing, power module and trim each ordered together separately.

Example: IC115LEDHSG	Example: IC115LEDPM 30K 120		Example: 835 WH		
Back Housing	Power Module	Color Temperature	Voltage	Trims	Trim Finish
<input type="text"/> IC115LEDHSG 	<input type="text"/> IC115LEDPM 	<input type="text"/> 30K 3000K 40K 4000K	<input type="text"/> 120 120V	<input type="text"/> 835 Full Opal Lens Step Light Trim  836 Opal Lens with Grill Step Light Trim  837 Opal Lens with Angeled Louvers Step Light Trim 	<input type="text"/> BL Black WH White

Trim Size: 9 3/4" L x 3 5/8" H